
FIGHTER FK1125 EURO 6 • 4x2 • MANUAL





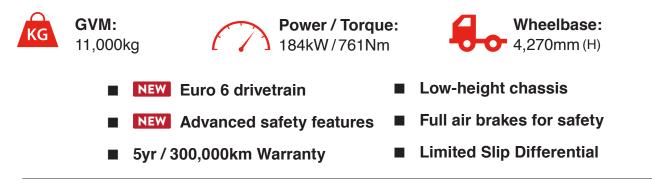

SPECIFICATIONS - FIGHTER FK1125 TIPPER EURO 6

MODEL

4x2 FK1125T TIPPER

ER 6 SP. MAN

STEEL SUSP. FK62FHY5RFAC(T)

WHEELBASE (mm)

4,270 (H)


GVM (kg) 11,000 GCM (kg)

ы	/ *
N	/A

Engine Version	FUSO 6M60-CAT5 Diesel
Configuration	6 Cyl. In-line OHC, 4-Valve
Туре	Variable Geometry Turbo Charged Air to Air Intercooler
Displacement	7.5 litre (7,545cc)
Power ECE Nett	177kW @ 2270rpm
Torque ECE Nett	745Nm @ 950-2270rpm
Power (JIS Gross)*	184kW (250ps)@ 2270rpm
Torque (JIS Gross)*	761Nm (561lb/ft) @ 950-2270rpm
Maximum Engine Speed (rpm)	2900
Compression Ratio	16.0:1
Cooling System/Oil Cooler	Water Cooled with Electronically Controlled Viscous Fan, 23L Capacity. Engine Oil Cooler
Air Cleaner	Paper Element Type with Restrictor Indicator. Vertical Intake Mounted on Clean Air Side (RH)
Cold Start Preheat	Standard
Emission Control	Selective Catalytic Reduction (SCR + DPF)
Emission Level	EURO 6
*Calculated	

*Calculated

6M60-CAT5



FUEL

Injection System	DENSO Common Rail System Electronically Controlled Direct Injection
Tank Type	Rectangular Steel Tank with Locking Cap
Fuel Capacity (L)	200
AdBlue Exhaust Fluid Capacity (L)	23

ELECTRICAL	
Voltage	24V Negative Earth
Alternator Capacity	24V-80 amp
Battery Specification	Heavy Duty 2 x 12V, 100Ah/20hr

CLUTCH	
	Manual
Clutch Model	FUSO C7M38
Туре	Single Plate Cerametallic 380mm
Operation/Specification	Air Assisted Hydraulic

TRANSMISSION

	Manual
Version	FUSO Manual M070S6-OD
Type/Speeds	6 with Air Assisted Gearshift
Features	Synchromesh 2nd-6th
Ratios	1st: 6.807 2nd: 4.172 3rd: 2.396 4th: 1.504 5th: 1.000 6th: 0.774 Rev. 6.807
PTO Opening	LH Side

PROPELLER SHAFT

	Manual
Туре	P10
Universal Joint	Needle Roller
FRONT AXLE	
Axle	FUSO F500T "I" Beam
Design Capacity (kg)	5,000
Max Operating Capacity (kg)	4,480
FRONT SUSPENSION	

Туре Taper Leaf spring with Stabiliser Bar and Double Acting Shock Absorbers Size (mm) 1,300 x 70 **REAR AXLE** Axle FUSO D052 Full Floating Hypoid + Limited Slip Differential Design Capacity (kg) 9,500 Max Operating Capacity (kg) 8,480 Ratio 4.625:1 **REAR SUSPENSION** Туре Steel Suspension Details Multi Leaf spring with Stabiliser Bar

Size Main Leaves (mm)	1,300 x 70
Size Helper Leaves (mm)	900 x 70
STEERING	

Power	Assisted	

Tilt/Telescopic Adjustable Steering Wheel

SPECIFICATIONS - FIGHTER FK1125 TIPPER EURO 6

BRAKES

Туре	Full Air, Dual Circuit, FUSO Taper Roller, Automatic Brake Adjustment, ABS
ASR (Traction Control)	Yes
Size Front / Rear (mm)	370 x 150
Park Brake	Rear Wheel Spring Actuated
Auxiliary	Exhaust Brake
Compressor	Water Cooled, 340cc Single Cylinder with Air Dryer

WHEELS AND TYRES

Wheel Type	7, Steel 19.5 x 6.75" ISO 8 Stud
Tyre Size (all)	245/70R19.5
Spare Tyre Carrier	Provided

CHASSIS

Туре	Parallel Channel		
Size (mm)	230 x 80 x 7.0		
Width (mm)	844		
B (

Refer to the bodybuilders guidelines on the Fuso website (www.fuso.co.nz) before mounting a body or modifying the chassis

INSTRUMENTS

Gauges	Speedo, Tacho, Air Pressure, Fuel, Ad Blue
Multi-Information Display (accessed from steering wheel buttons)	Hour Meter, Tripmeter, Outside Temp, Digital Speedo, Advanced Safety Systems control/warning, Water Temp, Fuel Consumption/Range, Cruise Control, DPF Information, Warning Lamps, Service Indicators, Oil Level, Alarm clock
Steering wheel controls	Audio / Phone / Cruise control / Multi-Information Display menu, Air suspension height, Idling speed adjustment

STANDARD FEATURES

Driving	Electric Windows, Keyless Central Locking, Fluorescent Cabin Lamp, Interior Reading Lamps, Engine Idle Speed Control
Storage	Centre Storage Console, Rear Bunk Storage Pocket, Dash Storage Tray 2 DIN Glove Compartment, 1 Single & 1 Double DIN Slot for Accessories, Overhead Storage Pocket with Lid, RH Door Storage Pocket, Cup Holders (4)
Cab Cooling/Heating	Air Conditioner / Heater / Demister
Accessory Power	24V Accessory Power Outlet

CAB FEATURES

CADILA		
Туре	All Steel Forward Control, Manual Tilt 44 deg.	
Mounting	Hydroelastic Susp. 4 Point	
Colour	Natural White (W31)	
Interior	Fully Trimmed + Heavy Duty Vinyl on floor	
Door	90 degree Opening Angle	
Seat (driver)	ISRI Air Susp. + Auto Levelling, Height, Tilt, Lumbar, Bolster + Dampening Adjust, Integral Headrest, Fabric Trim	
Seats (passenger)	ger) Centre: Low Back with Fabric Trim and Forward Folding Far Passenger: Fixed Base with Reclining Seat Back, Integral Headrest and Fabric Trim	
Seating Capacity	3	
Cab: External	Roof Mounting Points (max. static load 50kg), Front End-Outline Marker Lamps	

SAFETY FEATURES

SAFEITFEATURES		
ACTIVE SAFETY FEATURES		
Electronic Stability Control	Yes	W
Active Emergency Braking System	Yes	W
Lane Departure Warning System	Yes	W
Active Attention Assist	Yes	W
Active Side Guard Assist	Yes	W
САВ		
Structure	Reinforced, Side Door Intrusion Beams, Transom Window and Rear Quarter Glass	s
Airbags	Driver Air Bag and Seat Belt Pre-tension	er
Seatbelts	2 ELR Lap Sash, 1 Lap in centre seat	
Steering Wheel	Energy Absorbing, Tilt / Telescopic Adjustable	
Headlamp Auto Sensing	Halogen 2 x 70W / 75W	W
Day Time Running Lights	Yes	W
Fog Lamps	Yes	W
Rearview Mirrors	Remote Control / Heated with separate convex Spotter (Both Sides)	
Wipers	Auto Sensing	W
Keyless Central Locking + Immobiliser	Yes	W
6.2" Touchscreen Media Unit	AM/FM/DAB + USB + AUX, Apple Carplay / Android Auto, Wi-Fi enabled, Bluetooth, 32GB storage, HD Infrared Reverse Camera	
Connectivity	FMS CANBus Connector, NE ASAM Sensor Actuator Module	W
CHASSIS		
Speed Limter (100km/hr factory Set)	Yes (adjustable by FUSO dealer)	
Cruise Control	Yes	
Exhaust Brake	Yes	
Anti-Lock Brakes (ABS)	Yes	
Hill Start System	Yes	
Traction Control (ASR)	Yes	
Reverse Warning Buzzer	Yes	
OPTIONS		

Additional Cameras for Media Unit (up to 4), Truck Specific GPS Navigation, Reverse Sensors, Tyre Pressure Monitoring System (up to 36 tyres)

SERVICE INTERVALS

20,000km or 12 month full service intervals, depending on application/use.

WARRANTY

5 years / 300,000km cover

Simply have your vehicle serviced at an authorised FUSO Service Centre, at the recommended servicing intervals, and you are covered by an additional 2 year / 150,000km FUSO warranty on top of the first 3 years / 150,000km. That's a total of 5 years / 300,000km cover.

Refer to terms and conditions in the FUSO warranty booklet for full details.

KERB WEIGHTS AND MAX AXI E LOADS (kg)

		Vehicle Ratings**		Max Axle Loadings**		Kerb Weights*		
Model		GVM	GCM	Front	Rear	Front	Rear	Total
4x2 FK1125T Tipper 6 Sp. Man Steel Susp.	FK62FHY5RFAC(T)	11,000	N/A	4,480	8,480	2,670	2,540	5,210

* Weights (est.) includes 10L fuel and spare wheel and are subject to 2.5% variation (+/-) ** Vehicle ratings and max axle loadings may be limited by local regulations.

SPECIFICATIONS - FIGHTER FK1125 TIPPER EURO 6


PERFORMANCE

15.2
100
2,050
51%

*Theoretical performance only. Actual performance may vary under different conditions

DIMENSIONS (mm)
Wheelbase	4,270
Length Overall	6,995
Height Overall	2,480
Width Overall	2,280
Width Rear Axle	2,280
Width Front Track	1,780
Width Rear Track	1,710
Width Frame	844
Height Frame at Rear Axle	920

Туре:	Tipper Body
Body Capacity (m³):	3.5
Inside Body Dimensions (mm):	
Length x Width x Height	4,000 x 2,060 x 430
Floor Height From Ground to Rear Deck Floor	1,215
Thickness : Floor	4.5
Front, Side & Tailgate Panel	3.2
Sides and Tailgate Operation	Drop sides with two-way tailgate hinging at the top & bottom
Tipping Mechanism:	Under body hydraulic cylinder with link
Tipping Performance: Tip Angle (deg)	50
Lifting Time (sec)	20
Lowering Time (sec)	20

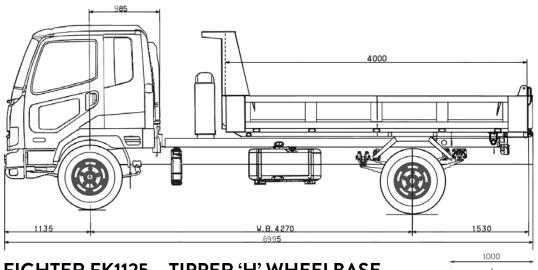

FIGHTER FK1125 – TIPPER 'H' WHEELBASE

Scale = 1:50 (20mm = 1 metre). This scale is accurate when used on the original spec sheet, be aware that enlarging these illustrations can alter the scale and cause incorrect measurements. Fuso New Zealand and its authorised dealers always recommend customers seek professional advice from independent sources before commencing any engineering activities.

A policy of continual improvement means that specifications detailed in this brochure are subject to change without notice. Contact your authorised Fuso dealer to confirm current specifications. Fuso is a registered trademark of Mitsubishi Fuso Truck & Bus Corporation. Copyright © Fuso NZ (2021)



UNIT: mm 20mm = 1m